


HIGH PRESSURE TOUCHLESS DRIVE-THRU BUS/TRUCK WASH

STANDARD FEATURES

- 1 x Pre-Rinse & Foamer Arch
- 4 x Electric Eye Actuators
- 1 x Spinner Arch c/w
- 13 Spinning Nozzle Heads (for 12ft vehicles)
- 15 Spinning Nozzle Heads (for 14ft vehicles)
- 1 x 50 HP Pump/Tank Assembly
- 1 x Hydrominder/Chemical Pump/Foamer Station Assembly
- 1 x 55ft Fixed Guide Rails c/w Epoxy Anchors
- 1 x Final Rinse Arch
- 1 x MCC c/w PLC base controls
- 1 x Pneumatic Panels
- 1 x Utility Racks
- 1 x 2" Water Make Up Solenoid
- 1 x Entrance Signal

OPTIONS

- Two step chemical application arch
- Chassis wash
- Wheel wash
- Water reclaim
- Blower/Dryer
- Stainless Steel skid plates
- Auto door control
- Splash curtains
- Water softener
- Water heater

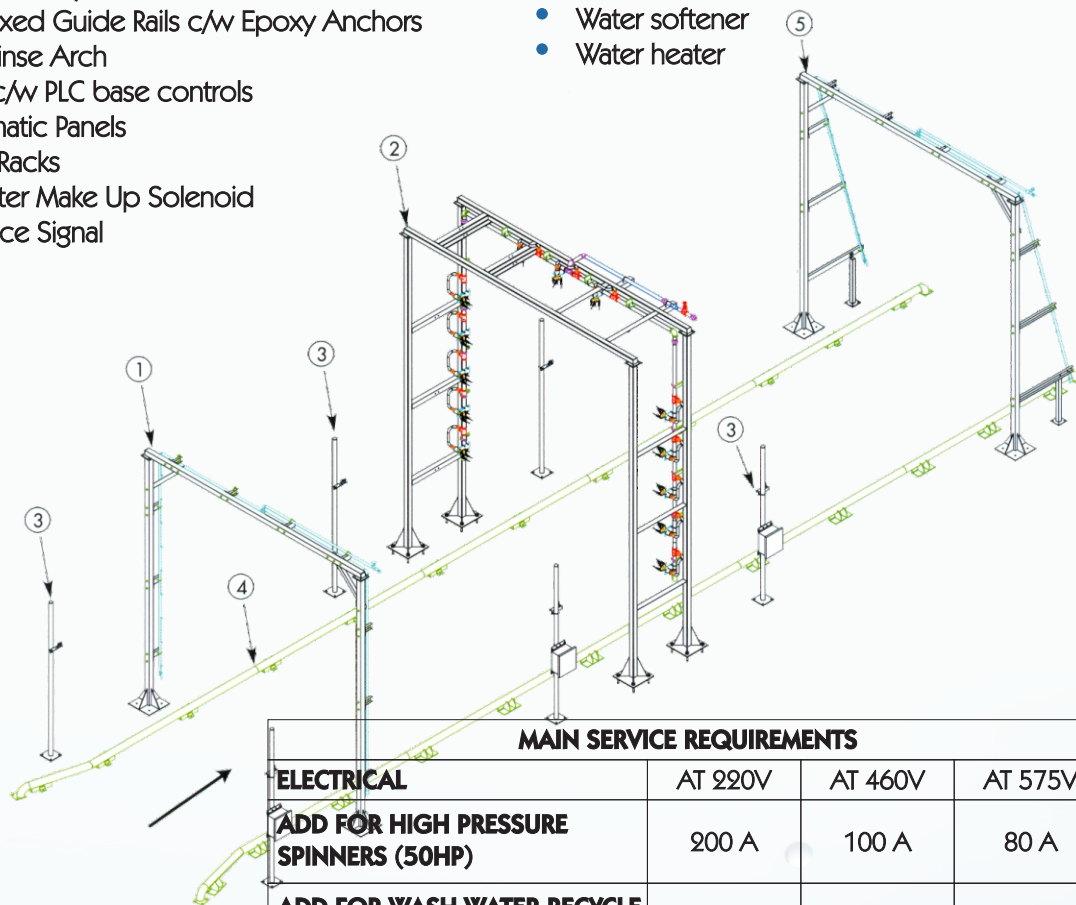

MAIN SERVICE REQUIREMENTS

	AT 220V	AT 460V	AT 575V
ELECTRICAL			
ADD FOR HIGH PRESSURE SPINNERS (50HP)	200 A	100 A	80 A
ADD FOR WASH WATER RECYCLE SYSTEM (TWO X 7.5 HP)	50 A	25 A	20 A
COMPRESSED AIR	1/2" AIR LINE AT 80 PSI		
WATER	2" MINIMUM COLD WATER LINE AT 50 PSI (DRAIN AND SEWAGE PER LOCAL CODES)		



6201 Hwy 7, Unit 4, Woodbridge, Ontario L4H 0K7
Tel: 888-421-3177 Fax: 905-850-2192
Email: info@psecoinc.com